



**DRIVE THE PROGRESS
IN WATER SOLUTION.**

ACTUATECH IS BY YOUR SIDE.

WWW.ACTUATECH.COM



WATER SERIES



ALUMINUM PNEUMATIC ACTUATORS



HANDWHEEL PNEUMATIC ACTUATORS



SPECIAL COATING PNEUMATIC ACTUATORS




STAINLESS STEEL PNEUMATIC ACTUATORS



APPLICATIONS



WATER PURIFICATION

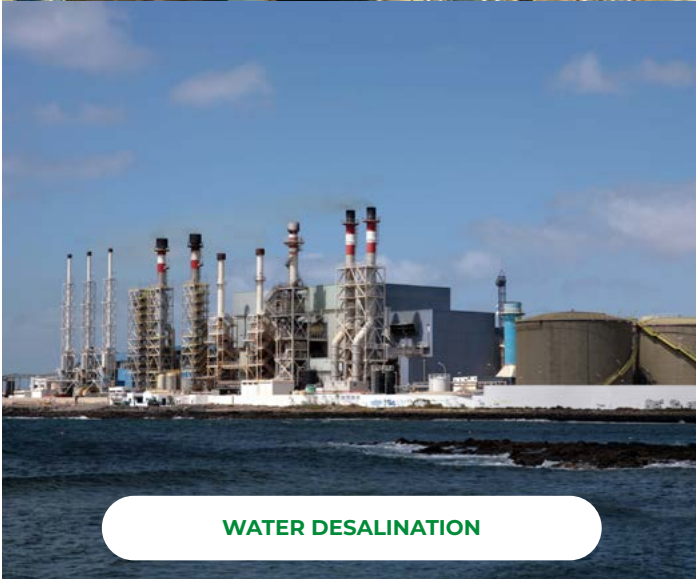


WATER DESALINATION



WASTE WATER TREATMENT



WATER FILTRATION

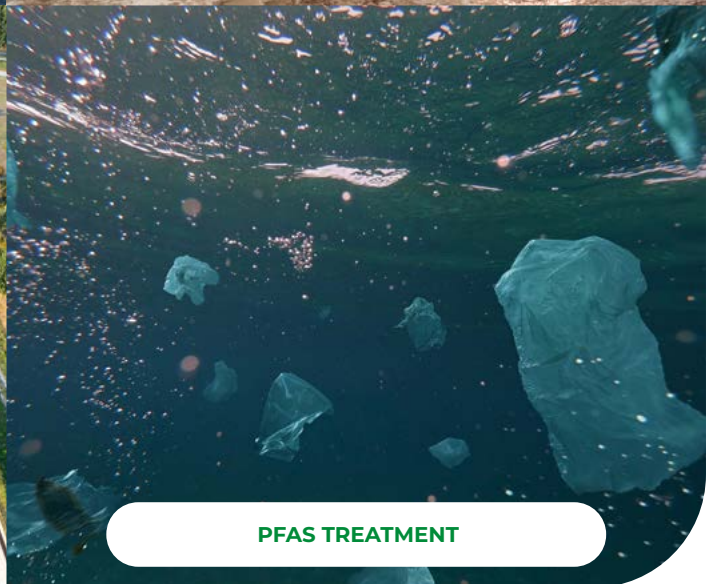

PFAS TREATMENT



TECHNICAL DETAILS

GD-GS

ALUMINIUM PNEUMATIC ACTUATORS



SPECIFICATIONS

✓ Type:	<ul style="list-style-type: none"> Scotch yoke
🔄 Nominal torque:	<ul style="list-style-type: none"> GD (Double acting): 8 Nm ÷ 8000 Nm 70 in-lbs ÷ 70806 in-lbs GS (Spring return): 15 Nm ÷ 4000 Nm 133 in-lbs ÷ 35403 in-lbs
↗ Size:	<ul style="list-style-type: none"> GD 8 ÷ DA 8000 GS 15 ÷ SR 4000
🔧 Body material:	<ul style="list-style-type: none"> Aluminium
⚙️ Variations:	<ul style="list-style-type: none"> Double acting Spring return N.C. - N.O.
⚙️ Options:	<ul style="list-style-type: none"> Low temp. version: -50°C / -58°F High temp. version: +150°C / +302°F Adjustable rotation Surface treatments
🏆 Certifications:	<ul style="list-style-type: none"> Ex CE/UKCA SIL (up to SIL3) DNV

HANDWHEEL

PNEUMATIC ACTUATORS WITH INTEGRATED HANDWHEEL



SPECIFICATIONS

✓ Type:	<ul style="list-style-type: none"> Scotch yoke
🔄 Nominal torque:	<ul style="list-style-type: none"> GD (Double acting): 60 Nm ÷ 3840 Nm 531 in-lbs ÷ 33986 in-lbs GS (Spring return): 30 Nm ÷ 1920 Nm 265 in-lbs ÷ 16993 in-lbs
↗ Size:	<ul style="list-style-type: none"> GDV 60 ÷ DANV 3840 GSV 30 ÷ SRNV 1920
🔧 Body material:	<ul style="list-style-type: none"> Aluminium
⚙️ Variations:	<ul style="list-style-type: none"> Double acting Spring return N.C. - N.O.
⚙️ Options:	<ul style="list-style-type: none"> Low temp. version: -50°C / -58°F High temp. version: +150°C / +302°F Surface treatments
🏆 Certifications:	<ul style="list-style-type: none"> Ex CE/UKCA SIL (up to SIL3)

CF8M

STAINLESS STEEL PNEUMATIC ACTUATORS



SPECIFICATIONS

✓ Type:	<ul style="list-style-type: none"> Scotch yoke
🔄 Nominal torque:	<ul style="list-style-type: none"> GD (Double acting): 15 Nm ÷ 1920 Nm 133 in-lbs ÷ 16993 in-lbs GS (Spring return): 15 Nm ÷ 960 Nm 133 in-lbs ÷ 8496 in-lbs
↗ Size:	<ul style="list-style-type: none"> GD 15 ÷ DA 1920 GS 15 ÷ SR 960
🔧 Body material:	<ul style="list-style-type: none"> Stainless steel Carbon steel
⚙️ Variations:	<ul style="list-style-type: none"> Double acting Spring return N.C. - N.O.
⚙️ Options:	<ul style="list-style-type: none"> Low temp. version: -50°C / -58°F High temp. version: +150°C / +302°F Surface treatments
🏆 Certifications:	<ul style="list-style-type: none"> Ex CE/UKCA SIL (up to SIL3)





NOTES:

A series of horizontal dotted lines for taking notes.



NOTES:

A series of horizontal dotted lines for taking notes.



ACTUATECH S.p.A.



Ph. +39 030 8908142 - Fax +39 030 8908143 - actuatech@actuatech.com - www.actuatech.com

VILLA CARCINA HEADQUARTERS

Via San Lorenzo, 70 - 25069 Villa Carcina (BS) ITALY

Coordinates:

Lat: 45° 39' 09.6" North; Lon: 10° 11' 49.5" East

SAREZZO SITE

Via Fratelli Capponi, 126 - 25068 Sarezzo (BS) ITALY

Coordinates:

Lat: 45° 39' 48.5" North; Lon: 10° 11' 39.4" East